

LINEAR FIXTURE TRACK - RECESSED DOWN LIGHT SPEC SHEET



LFT60-K



The LFT60-K Series is a recessed downlight fixture with a minimalistic and modern design. With its wide range of track mounting options, the LFT60-K is compatible with recessed, surface and suspended pendant mounting. This series is equipped with dimming and a standard color temperature of 3000K. The LFT60-K5 in particular has a length of 283 mm and a rated power of 13 Watts with three beam angle options, suitable for different environments.




SPECIFICATIONS

OPERATING VOLTAGE	120 VAC
RATED POWER	13W
CONTROL	0/1-10 V Dimmable
FLUX	781 lm
CRI	>90
BODY FINISH	Black, White
BAFFLE FINISH	Black, White, Piano Black
MOUNTING	Track mounted
PROJECTION	20°, 30°, 40°

LFT60-K5

V	120 VAC Operating Voltage
W	13W Rated Power

DIMENSIONS

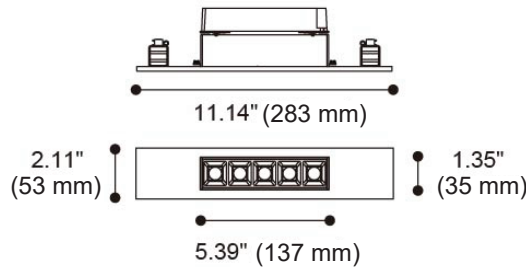


ORDERING CODE


SERIES	TYPE	POWER	VOLTAGE	CRI	COLOR TEMPERATURE	PROJECTION	TRACK MOUNTING	BODY FINISH	BAFFLE FINISH
LFT60	K5 - Recessed Downlight 5	13W - 13 WATTS	AC - 120VAC	90 - CRI90	CT30 - 3000K CTXX - CUSTOM	20D - 20 Degrees 30D - 30 Degrees 40D - 40 Degrees	RM - Recessed Mount SM - Surface Mount PM - Pendant Mount	BK - Black WH - White	BK - Black WH - White PBK - Piano Black

Sample: LFT 60-K5 - 13W - AC - 90 - CT30 - 40D - SM - BK - WH


PHOTOMETRIC DATA



BEAM ANGLE:	20°
MAX. I:	4338 cd.
FLUX:	781 lm
SC (0-180):	.34
SC (90-270):	.36



BEAM ANGLE:	30°
MAX. I:	3081 cd.
FLUX:	820 lm
SC (0-180):	.44
SC (90-270):	.52



BEAM ANGLE:	40°
MAX. I:	1683 cd.
FLUX:	792 lm
SC (0-180):	.68
SC (90-270):	.66




LINEAR FIXTURE TRACK - MOUNTING & ACCESSORIES




LFT60-K

MOUNTING OPTIONS




TRIMLESS: LFT-T-11




TRIMLESS TRACK SECTION	
Article number	TYPE
LFT-T-11-44	Channel
LFT-T-11-89	Channel

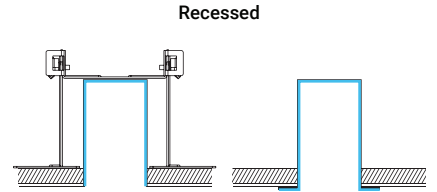

TRIM: LFT-F-11

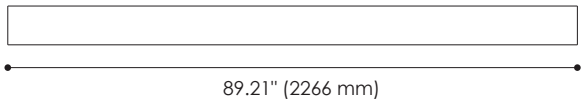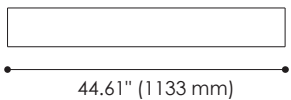



TRIMMED TRACK SECTION	
Article number	TYPE
LFT-F-11-44	Channel
LFT-F-11-89	Channel

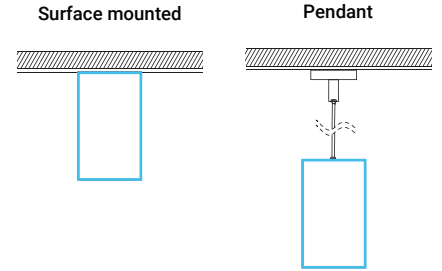


ACCESSORIES

ALL MODELS



3PCS

SKU : LFT-NC-02
Type : Surface mounted & Pendant reinforced plate



SKU : LFT-NC-07
Type : Light Leak-proof aluminium extrusion reinforce plate



Colours
Black White

SKU :
LFT-NE-02-11 11.14" (283 mm)
LFT-NE-02-22 22.28" (566 mm)
Type : Blank cover




SKU : LFT-SA-41
Type : Power cord connector




SKU : LFT-PA-41-180
71" (1800 mm)
Type : Power cord connect to AC



SKU : LFT-SA-41-30 12" (300 mm)
LFT-SA-41-60 24" (600 mm)
Type : Power cord connect between modules





SKU : LFT-PSA-31-180 71" (1800 mm)
Type : Signal wire connect to system / dimmer




SKU : LFT-SSA-31-30 12" (300 mm)
LFT-SSA-31-60 24" (600 mm)
Type : Signal wire connect between modules

PENDANT



SKU : LFT-DI-15
Type : Pendant Kit for power connection (without power cord)





SKU : LFT-DI-15-V
Type : Pendant Kit for power connection and signal wire



SKU : LFT-DI-16
Type : Pendant kit



TRIM



2PCS


SKU : LFT-NC-05
Type : Trim end cap

TRIMLESS



2PCS

SKU : LFT-NC-03
Type : End cap



2PCS

SKU : LFT-NR-01
Type : Trimless bracket